

# CME BOOSTER

INDUSTRIAL QUALITY PRESSURE BOOSTER  
WITH INVERTER TECHNOLOGY

**GRUNDFOS**   
**HiFLOPUMPS**  
Service . Expertise . Quality

## WATER SOURCE



Above  
Pump Level



Mains  
Water

## APPLICATION



Household  
Water



Irrigation



Mains  
Boosting

Approved for  
Drinking Water  
AS/NZS 4020


**2**  
YEAR  
WARRANTY



SCAN THE QR CODE  
TO LINK TO GRUNDFOS  
PRODUCT CENTER

The Grundfos CME Booster is an industrial quality, intelligent inverter pump that adjusts its performance constantly according to household water demand, eliminating pressure fluctuations and resulting in lower running costs.

- **Perfect pressure to all taps** - Inverter technology (variable speed) adjusts motor speed according to demand to deliver perfect pressure to all taps
- **Low running costs** - High efficiency motor keeps energy consumption down and running costs low
- **Industrial quality** – Designed and built to suit industrial applications, so easily handles larger domestic water supply or mains boosting applications
- **Quiet operation** - Very quiet operation that won't disturb your family or neighbours
- **Superior materials** - Constructed of high quality industrial grade components. All parts in contact with water are made from 304 stainless steel.
- **Reduced pump start/stops** - The inbuilt pressure tank minimises pump start/stop frequency
- **One-touch pressure adjustment** - The intuitive and intelligent control panel allows for simple adjustment of pressure to the taps



## PUMP NOISE



SCLA2

47 dB Max.



CM Booster  
Self-Priming

55 dB Max.



CME Booster

55 dB Max.



Jet Pump  
Range

70 dB

## PUMP SIZING

Higher pressure for multi-level dwellings and long runs of pipe	CMBE 1-44	CMBE 1-44	CMBE 3-62	CMBE 5-62
High pressure for double storey dwellings and long runs of pipe	CMBE 1-44	CMBE 1-44	CMBE 3-62	CMBE 5-62
Adequate pressure for most single storey dwellings	CMBE 1-44	CMBE 1-44	CMBE 3-62	CMBE 5-62
	Small House 2-3 taps	Medium House 3-4 taps	Large House 4-5 taps	Large House + Irrigation 5-7 Taps

## PROTECTION & CONTROL\*



CME  
Booster

Auto Start/Stop

✓

Non-Return Valve

✓

Dry Run Protection

✓

Adjustable Start Pressure

✓

Alarm Indication LED

✓


Pressure Gauge

✓


Taps are 15 l/min at 22.5 m head

## TECHNICAL & PERFORMANCE DATA

### PERFORMANCE CURVE

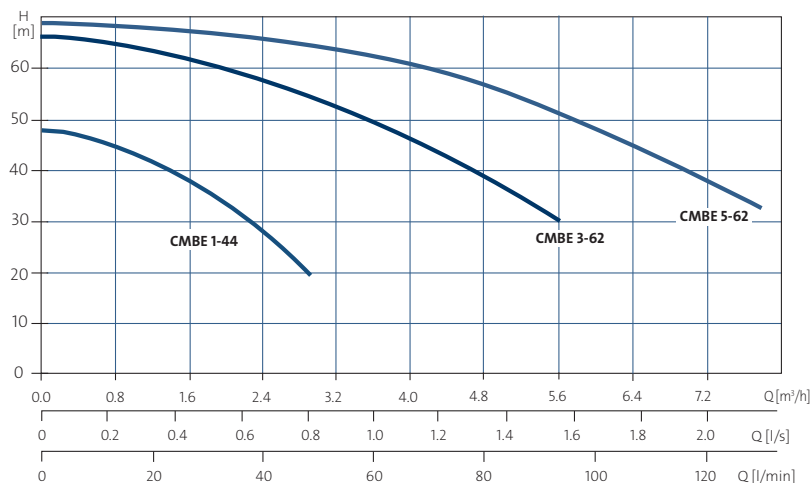

### PHYSICAL ATTRIBUTES

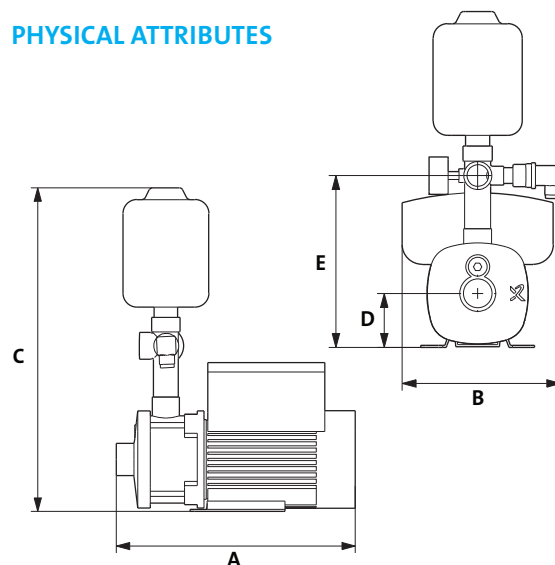

### OPERATING CONDITIONS

Ambient Temperature	0°C to +55°C
Liquid Temperature	0°C to +60°C
System Pressure	Max. 10 bar
Sound Pressure	Max. 55 dB

### TECHNICAL DATA

Power Supply Voltage	200-240 Volt, 50 Hz
Power Supply Cable	1.5 m with plug
Enclosure Class	Undercover installation recommended (IP55)
Approvals and Markings	Approved for Drinking Water AS/NZS 4020 C-Tick Compliance

Model	Motor Power P2 (kW)	Connections		Dimensions (mm)					Weight (kg)
		Inlet	Outlet	A (l)	B (w)	C (h)	D (inlet)	E (outlet)	
CMBE 1-44	0.55	1" Female	1" Female	326	217	440	75	200	16
CMBE 3-62	1.10	1" Female	1" Female	344	217	440	75	200	17
CMBE 5-62	1.50	1 1/4" Female	1" Female	350	217	455	90	215	17

Visit our Auckland or Rotorua Branch to have a chat about the CME Booster Pump. Alternatively flick us a call or email, and we will get back to you ASAP.

**Hi Flo Auckland Branch**  
3 Fairfax Avenue, Penrose, Auckland 1642  
09 579 6375  
Sales@hiflopumps.co.nz

**Hi Flo Rotorua Branch**  
72 Old Taupo Road, Mangakakahi, Rotorua 3015  
07 348 7516  
Sales@hiflopumps.co.nz