


DRAINAGE PUMPS

SUBMERSIBLE PUMP RANGE

HiFLO PUMPS
Service . Expertise . Quality

SHOWFOU PUMP

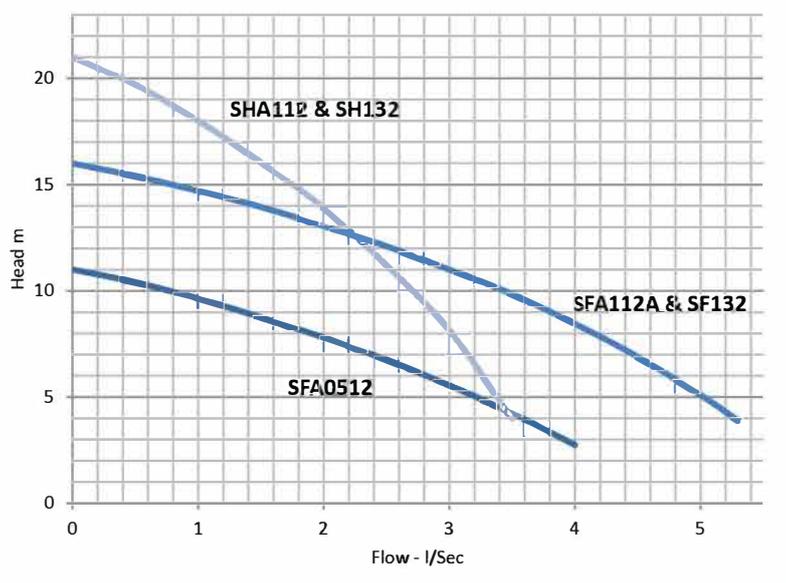

| Model | Type | Solids Size | Auto/Manual | Motor Size | Voltage | FL - Amps | Discharge | Height | Diameter | Weight | Cable Length |
|---------|---|-------------|-------------|------------|---------|-----------|-----------|--------|----------|--------|--------------|
| SFA0512 | Drainage Pump with Open Impeller | 4mm | Auto | 0.4kW | 1 x 240 | 3.6 | 50mm | 355mm | 215mm | 11kg | 6m |
| SFA112A | Drainage Pump with Open Impeller | 6mm | Auto | 0.75kW | 1 x 240 | 7.0 | 50mm | 460mm | 255mm | 21kg | 6m |
| SF132A | Drainage Pump with Open Impeller | 6mm | Manual | 0.75kW | 3 x 400 | 1.75 | 50mm | 460mm | 255mm | 21kg | 6m |
| SHA112 | High Head Drainage Pump - Closed Impeller | 3.5mm | Auto | 0.75kW | 1 x 240 | 6.4 | 40mm | 437mm | 265mm | 23kg | 6m |
| SH132 | High Head Drainage Pump - Closed Impeller | 3.5mm | Manual | 0.75kW | 3 x 400 | 1.75 | 40mm | 437mm | 265mm | 23kg | 6m |

Showfou Drainage Pumps are a robust design with the pumps constructed in cast iron and stainless steel. There are two impeller types, open impeller for larger solids and the closed impeller pumps for high head applications.

Key features are:

- Epoxy sealed cable plug
- Double Mechanical Seal (Ceramic/Carbon) and separate Oil Seal
- Motors fitted with built in thermal protection & built for continuous duty
- Open impeller and closed impeller options
- Available in manual or automatic (integrated float switch)
- Available with single & three phase motors

The Showfou Drainage Pumps are ideal for dewatering applications, stormwater drainage or effluent disposal. Refer to the data table for maximum solids size.