


UNILIFT KP

SUBMERSIBLE STAINLESS STEEL DRAINAGE PUMP

GRUNDFOS 
HiFLOPUMPS
 Service . Expertise . Quality

WATER SOURCE



Clean Water

Storm/
Grey Water

APPLICATION



Clean Water
Drainage

Storm/Grey
Water Handling



SCAN THE QR CODE
TO LINK TO GRUNDFOS
PRODUCT CENTER

The Grundfos UNILIFT KP is a highly durable submersible pump constructed from stainless steel, making it ideal for all types of grey water and storm water handling around the home and in light industrial applications.




- **High corrosion resistance** - Constructed of high quality industrial grade components. All parts in contact with water are made from 304 stainless steel.
- **Options for confined areas** - A vertical Niro Float Switch option is available for installation into confined pits where a regular float may not operate properly
- **Suitable for fully or partially submerged use** - Comes with an integrated motor cooling jacket, allowing the pump to operate for extended periods whilst only partly submerged
- **Light weight and portable** - At a weight of no more than 7 kg the UNILIFT KP can be used in either a permanent installation or as a portable drainage pump
- **Easy submerged installation – plug & pump** - Connect the pump outlet to the pipework, plug into a power outlet and you're ready to pump



PUMP SIZING

	UNILIFT KP 150	UNILIFT KP 250	UNILIFT KP 350
	32 mm pipework 1.4 l/sec flow rate	32 mm pipework 1.4 l/sec flow rate	32 mm pipework 2.0 l/sec flow rate
Vertical Height	Maximum Horizontal Pipe Length		
5 m		1 m	5 m
4 m		10 m	9 m
3 m		18 m	13 m
2 m	9 m	26 m	17 m
1 m	17 m	35 m	22 m

MAXIMUM PARTICLE SIZE

UNILIFT KP	UNILIFT CC	UNILIFT AP 12
		
10 mm	10 mm	12 mm

PROTECTION & CONTROL




	UNILIFT KP (No Float)	UNILIFT KP (Float)
Auto Start/Stop by Float Switch		✓
Non-Return Valve		✓
Motor Cooling Jacket	✓	✓
Automatic Restart	✓	✓

Flow based on at least 1 m/sec velocity

TECHNICAL & PERFORMANCE DATA

PERFORMANCE CURVE

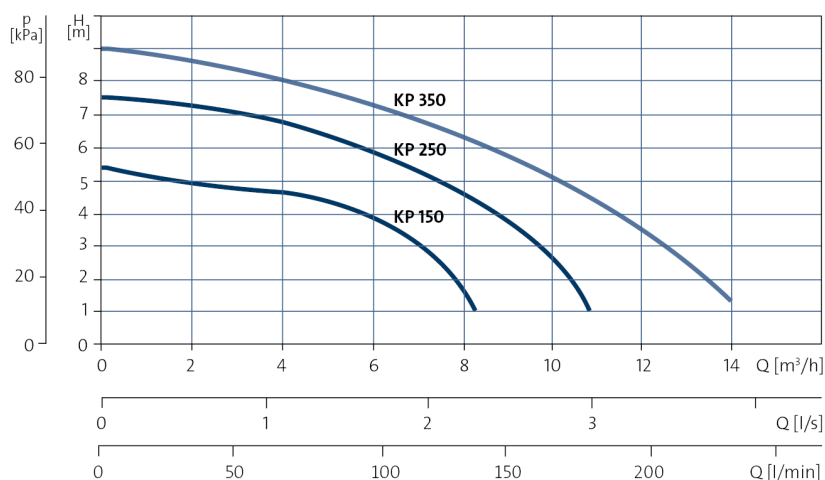


OPERATING CONDITIONS

Liquid Temperature	0°C to +50°C
Max. Particle Size	10 mm
Max. Installation Depth	10 m
Minimum Pumping Level	Down to 100 mm
pH value of pumped liquid	4 to 9


TECHNICAL DATA

Power Supply Voltage	220-240 Volt, 50 Hz
Power Supply Cable	5 m with plug
Enclosure Class	Suitable for submerged installation (IP68)
Approvals and Markings	C-Tick Compliance
Impeller Type	Semi-open

PHYSICAL ATTRIBUTES

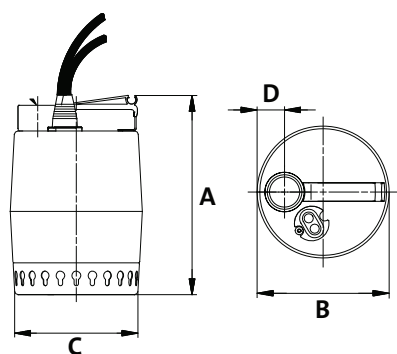

MINIMUM PIT DIMENSIONS UNILIFT KP - NORMAL/VERTICAL FLOAT

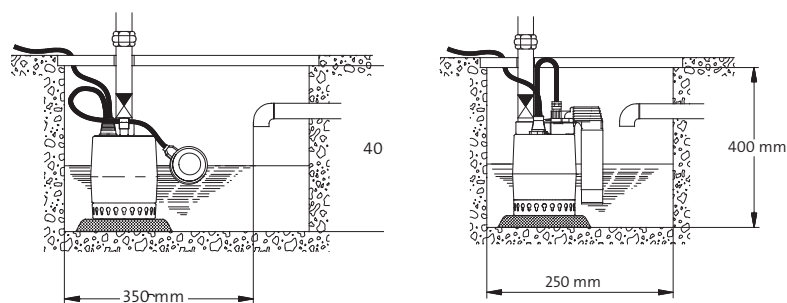

Model	Motor Power P2 (kW)	Connection	Dimensions (mm)				Weight (kg)
		Outlet	A (h)	B (w1)	C (w2)	D (outlet)	
UNILIFT KP 150	0.30	1 1/4" Female	225	140	149	31	7
UNILIFT KP 250	0.48	1 1/4" Female	225	140	149	31	7
UNILIFT KP 350	0.70	1 1/4" Female	235	140	149	31	7

Visit our Auckland or Rotorua Branch to have a chat about the Unilift KP Pump. Alternatively flick us a call or email, and we will get back to you ASAP.

Hi Flo Auckland Branch
3 Fairfax Avenue, Penrose, Auckland 1642
09 579 6375
Sales@hiflopumps.co.nz

Hi Flo Rotorua Branch
72 Old Taupo Road, Mangakakahi, Rotorua 3015
07 348 7516
Sales@hiflopumps.co.nz