


# SEWAGE PUMPS

## SUBMERSIBLE PUMP RANGE

**HiFLOPUMPS**  
Service . Expertise . Quality

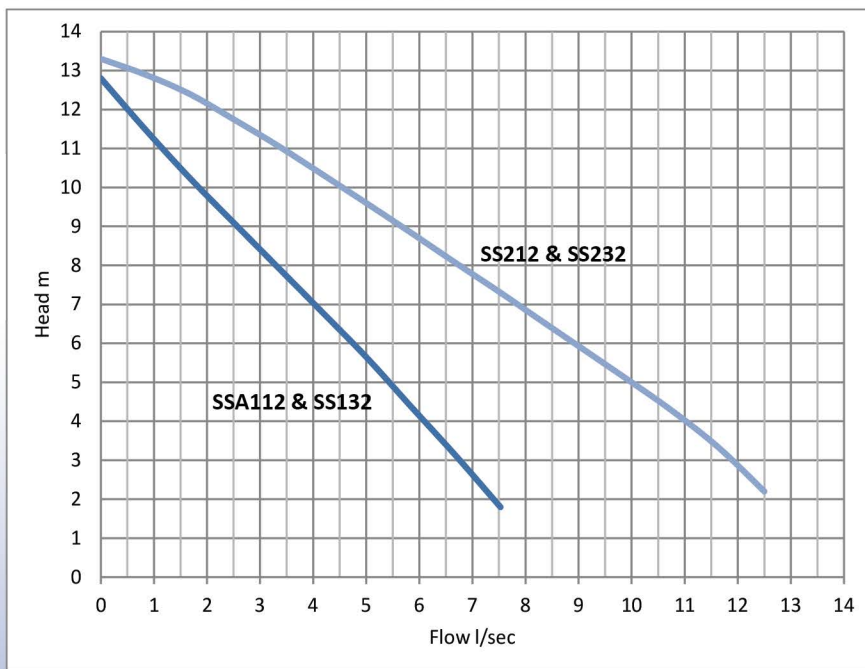

Model	Type	Solids Size	Auto/Manual	Motor Size	Voltage	FLC - Amps	Discharge	Height	Diameter	Weight	Cable Length
SSA112	Cutter Pump	25mm	Auto	0.75kW	1 x 230	6.4	50mm	470mm	290mm	22kg	6m
SS132	Cutter Pump	25mm	Manual	0.75kW	3 x 400	1.75	50mm	470mm	290mm	22kg	6m
SS212	Cutter Pump	28mm	Manual	1.5kW	1 x 230	13.0	80mm	550mm	355mm	36kg	10m
SS232	Cutter Pump	28mm	Manual	1.5kW	3 x 400	3.2	80mm	445mm	355mm	30kg	10m

The Showfou sewage pumps are a cutter pump fitted with a single blade semi-open impeller and a cutter plate. The impeller blades and cutter plate are heat treated to ensure a hardened finish. The pumps are constructed of cast iron and stainless steel ensuring a robust and reliable pump.

Key features are:

- Epoxy sealed cable plug
- Double Mechanical Seal (Ceramic/Carbon) and separate Oil Seal
- Motors fitted with built in thermal protection & built for continuous duty
- Single blade non-clogging impeller, with shredder mechanism
- Available in manual or automatic (integrated float switch)
- Available with single & three phase motors

The Showfou sewage pumps are suitable for domestic and light commercial sewage applications and dewatering water with fibres.